



# 订货手册

Order Manual

<https://www.xinyuan-hydraulic.com/>



真诚打造信誉 追求更高品质

Sincerely build reputation and pursue higher quality

联系人/Name: 王霞/ Stacey.Wang

电话/Tel: 138-1458-5254

邮件/E-mail: [Stacey.wang@xinyuan-hydraulic.com](mailto:Stacey.wang@xinyuan-hydraulic.com)

工厂地址: 安徽省芜湖市湾沚区佳海产业园A区88号

Factory ADD: No. 88, zone a, Jiahai Industrial Park, Wanyi District, Wuhu City, Anhui Province

办公地址: 昆山市张浦镇俱进路68号(德国工业园)

Office ADD: No.68, Jujin Road(German Industrial Park), Zhangpu Town, Kunshan Jiangsu China



昆山戈登商贸有限公司  
Kunshan Gordon Trade Co.,Ltd.

# 公司简介

## COMPANY PROFILE

昆山戈登商贸有限公司是一家专注于液压软管及液压附件研发、生产和销售的公司。

公司主要产品包括:测压软管总成及微型液压系统,液压测试系统,压力表,等。产品广泛运用于液压流体传动、气动工具、工程机械、机床润滑等。产品销往全国各地,并出口到欧美东南亚各国公司自成立以来,一直坚持“质量第一,服务及时”的经营理念。经过多年的市场拓展,在工程机械,液压流体传动行业占有了一定的市场份额。随着技术的不断积累,和对市场的探索研究,公司根据客户新的需求陆续开发出一系列新品,以满足市场和客户的要求。

目前公司雄厚的加工能力和技术实力,使得产品的品质和交期得到保证,丰富的液压管路开发和设计能力,为客户带来工作上的便捷。昆山戈登商贸有限公司将不断创新,和客户建立稳定友好的合作关系,并不断为客户创造更高的价值而努力。

### Brief Introduction

Kunshan Gordon Trade Co.,LTD. is a focus on hydraulic hose assemblies and hydraulic accessories development, production and sales of company.

Kunshan Gordon main products include: pressure hose assembly, hydraulic test systems, pressure gauges, etc. Products are widely used in high pressure cleaning equipment, hydraulic power transmission, pneumatic tools, engineering machinery, machine tool lubrication, etc.

Products sold throughout the country, and exported to Europe, America and southeast Asian countries.


Kunshan Gordon since its inception, always adhere to the "quality first, timely service" business philosophy. After years of market development, We occupies a certain market share in engineering machinery, machine tools, high pressure cleaner industry. With the steady accumulation of technology and the exploration of the market research, the company according to customers new demand gradually developed a series of new products, to meet market and customer requirements.

Now, Kunshan Gordon already have a number of experienced technical personnel. Company processing capacity and strong technical strength, make the product quality and delivery guaranteed.

Abundant hydraulic line development and design ability, work bring convenient for the customer.

Kunshan Gordon Trade Co.,LTD. will continue to innovation, and to establish stable friendly relations of operation with customers, and constantly strive to create more value for clients.

### 测压软管性能简介和规格参数 Description and application



微型高压软管用于微液压系统, 液压系统中各点压力的检测。作为传导流体介质的管道, 具有重量轻、耐磨、抗冲击性强、弹性良好、膨胀率极低、使用简便等特性。该软管适用于: 矿物油、水、乙醇、酒精、汽油、乳化液、气体等介质。

Test pressure hose is applied in micro hydraulic system and testing pressure in hydraulic system. It's specification includes: light weight, wear resistance, strong impact resistance, good flexibility, friendly use, and so on.

Fluid service: mineral oil, water-glycol, alcohol, gasoline, water-oil emulsions, gas, etc.

### 技术参数 ( Technical information )


		DN2-400	DN2-630	DN3-630	DN4-500
软管内径 inside diameter	mm	2	2	3	4
软管外径 outer diameter	mm	5	5	6	8
最大静态压力 Max. quiescent pressure	Bar	400	630	630	500
最小爆破压力 Min. burst pressure	Bar	1200	1890	1890	1500
最小弯曲半径 Min. bending radius	mm	20	20	25	35
重量 weight	g	20	20	27	47
适用温度 temperature range	℃	-40~+100	-40~+100	-40~+100	-40~+100
软管内层材质 core material		聚酰胺(PA)			
增强层材质 reinforcement material		Fiber or Kevlar			
软管外层材质 cover material		聚酰胺(PA) or 聚氨酯(PU)			





测压软管  
Test Hose

HF系列测压软管总成的订购 How to order

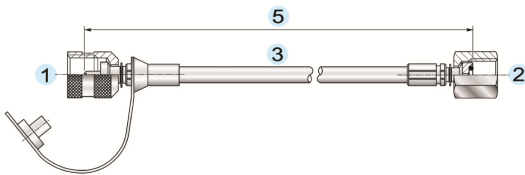

订购型号说明

HF 1-2-3-P\*-5

HF 微型压力软管总成缩写

HF Abbreviation of micro high pressure flexible hose assembly

1 软管一端接头型号

Fitting model of one end

2 软管另一端接头型号

Fitting model of the other end

3 软管型号 (2=DN2, 3=DN3, 4=DN4)

Hose type (2=DN2, 3=DN3, 4=DN4)

P\* 压力等级 (P40=400bar, P60=630bar)

Pressure class (P40=400bar, P60=630bar)

5 软管长度: mm

Hose length:mm

1、例如：用户欲订购一端为连接测压点接头，其螺纹为M16×2，另一端为接压力表接头，其螺纹为M14×1.5，软管规格为：DN3，压力等级为：600BAR(60MPa)，软管长度为：1500mm，则订货型号为：HFH0200-P0100-3-P60-1500。

For example: One end with quick fitting of connecting thread is M16×2. The other is connected to the pressure gauge pressure gauge, and the connecting thread is M14×1.5. The hose type is DN3, the pressure class is 600BAR(60MPa), the hose length is 1500mm, then the model of this is: HFH0200-P0100-3-P60-1500.


2、订购直接接压力表形式的软管总成时，若用户需要带压力表时，则要在订单上说明压力表的量程和表盘直径等。

When you want to order the hose assembly with pressure gauge, you should clearly describe pressure gauge in order, such as the pressure range, gauge diameter or other special requirement.


测压软管接头  
Hose End

HF系列测压软管接头型号 Fittings type

连接测压点母螺纹接头 Test coupling threaded female fitting: H series




G	Ch	代号/Code
M12×1.25		H0100
M16×2.0		H0200
M14×1.5		H0300
M16×1.5		H0400




G	Ch	代号/Code
M12×1.25		H0190
M16×2.0		H0290
M14×1.5		H0390
M16×1.5		H0490

连接测压点带外六角母螺纹接头 Test coupling threaded female fitting with hexagonal nut: H series




G	Ch	代号/Code
M12×1.25	19	H0100-1
M16×2.0	19	H0200-1
M14×1.5	19	H0300-1
M16×1.5	19	H0400-1




G	Ch	代号/Code
M12×1.25	19	H0190-1
M16×2.0	19	H0290-1
M14×1.5	19	H0390-1
M16×1.5	19	H0490-1

测压软管接头  
Hose End

压力表螺纹接头 Gauges threaded fitting : P series




G	Ch	代号/Code
M14×1.5	17	P0100
M20×1.5	24	P0200
G1/4"	17	P0300
G1/2"	27	P0400




G	Ch	代号/Code
M14×1.5	17	P0190
M20×1.5	24	P0290
G1/4"	17	P0390
G1/2"	27	P0490

压力表螺纹接头 Gauges threaded fitting : A series



G	Ch	代号/Code
M14×1.5	17	A01
M20×1.5	24	A02
G1/4"	17	A03
G1/2"	27	A04


压力表螺纹接头 Gauges threaded fitting : W series



G	Ch	代号/Code
1/4" -18NPTF	19	W01
1/2" -14NPTF	24	W02


测压软管接头  
Hose End

活动螺母连接D型60°锥面密封式 Swivel female fitting 60° cone connection : D series




G	Ch	代号/Code
G1/8"	12	D01
G1/4"	17	D02

活动螺母连接24°锥面密封 Swivel female fitting 24° cone connection : Q series




G	d	Ch	代号/Code
M08×1.0	4	10	Q0100
M10×1.0	6	12	Q0200
M12×1.5	6	14	Q0300
M14×1.5	6	17	Q0400
M14×1.5	8	17	Q0500
M16×1.5	8	19	Q0600
M16×1.5	10	19	Q0700
M18×1.5	10	22	Q0800
M18×1.5	12	22	Q0900
M20×1.5	12	24	Q1000



G	d	Ch	代号/Code
M08×1.0	4	10	Q0190
M10×1.0	6	12	Q0290
M12×1.5	6	14	Q0390
M14×1.5	6	17	Q0490
M14×1.5	8	17	Q0590
M16×1.5	8	19	Q0690
M16×1.5	10	19	Q0790
M18×1.5	10	22	Q0890
M18×1.5	12	22	Q0990
M20×1.5	12	24	Q1090


直插式 Plug-in connection : T series



d	L	代号/Code
3.3	27	T01


测压软管接头  
Hose End

活动螺母连接 JIC74° 锥面密封系列 Swivel female fitting JIC 74° connection: C series




G	Ch	代号/Code
7/16-20UNF	14	C01
1/2-20UNF	17	C02
3/8-24UNF	12	C03
9/16-18UNF	19	C04

卡套杆式 Standpipe fitting: B series




d	L	代号/Code
4.0	36	B0100
6.0	36	B0200
8.0	37.5	B0300

卡套杆式 Standpipe fitting: B series



d	L	H	代号/Code
4.0	33	25.5	B0190
6.0	33	28.0	B0290
8.0	41	37.0	B0390


铰接式 Banjo fitting and banjo screw: J series



G	代号/Code
M08×1.00	J01
M10×1.00	J02
M14×1.50	J03
G1/4"	J04


测压软管接头  
Hose End

外螺纹密封式 Male fittings: E series




G	Ch	代号/Code
M8×1	12	E01
M10×1	14	E02
M12×1.5	14	E03
M14×1.5	17	E04
M16×1.5	19	E05
G1/8"	14	E06
G1/4"	17	E07
7/16-20UNF	12	E08

锥螺纹密封式 Male fittings: Z series



G	Ch	代号/Code
R1/8"-28	12	Z01
R1/4"-19	17	Z02
1/8"-27NPT	12	Z03
1/4"-18NPT	17	Z04

套筒 Ferrule



DA	DI	L	代号/Code
8.0	5.5	15.0	F02
9.0	6.5	15.0	F03


测压软管总成示例 Sample of test hose assembly



测压接头  
Test Coupling

PT系列微型测压头 PT series test couplings for pressure checking


- 应用**  
- 压力监测  
- 润滑  
- 排气  
- 油品取样
- 材料**  
- 镀锌碳钢  
- AISI 316不锈钢(可选)
- 密封**  
- 丁腈橡胶  
- 氟橡胶(可选)  
- 工作温度  
-30C...+125C(丁腈橡胶)  
-25C...+230C(氟橡胶)
- 工作介质**  
- 液压油  
- 矿物油基油类  
- 适用手其他符合要求的介质
- Applications:**  
- Pressure control  
- Lubrication  
- Air bleeding  
- Oil sampling
- Materials:**  
- Galvanized carbon steel  
- (Stainless steel AISI 316 is available on request)
- Sealing:**  
- NITRIL-BUNAN (NBR)  
- FKM-VITON (on request)  
- Working temperature:  
-30°C...+125°C(NITRILE-BUNAN)  
-25°C...+230°C(FKM)
- Fluids:**  
- Hydraulic oils  
- Mineral oils  
- Suitability with other fluids on request

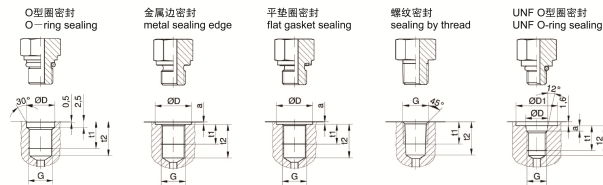

G	ΦD	t1	t2	G	ΦD	a	t1	t2	G	ΦD	a	t1	t2	G	t1	t2	G	ΦD1	ΦD	a	t1	t2	
M08x1	9.5	11	15.5	M08x1	13	1	8	10	M10x1	15	1	8	10	1/8 NPT	6.9	11.6	5/16-24 UNF	17	9.1	1.9	10	12	
M10x1	11.5	12	16.5	M10x1	15	1	8	10	M10x1.25	18	1.5	10	15	1/4 NPT	10	16.4	7/16-20 UNF	21	12.4	2.4	11.5	14	
M10x1.25	11	12	16.5	M12x1.5	18	1.5	12	15	M12x1.5	18	1.5	12	15	3/8 NPT	10.3	17.6	9/16-18 UNF	25	15.7	2.5	12.7	15.5	
M14x1.5	15.8	12	18	M14x1.5	20	1.5	12	15	M14x1.5	20	1.5	12	15	R 1/8	5.5	9.5							
				M16x1.5	23	1.5	12	15	M16x1.5	23	1.5	12	15	R 1/4	8.5	13.5							
				M18x1.5	25	2	12	15	M18x1.5	25	2	12	15	R 3/8	12	20							
				M20x1.5	27	2	14	17	M20x1.5	27	2	14	17										
				M22x1.5	28	2.5	14	17	M22x1.5	28	2.5	14	17										
				M26x1.5	32	2.5	16	19	M26x1.5	32	2.5	16	19										
				M27x2	33	2.5	16	20	M27x2	33	2.5	16	20										
				M33x2	40	2.5	18	22	M33x2	40	2.5	18	22										
				M42x2	50	2.5	20	24	M42x2	50	2.5	20	24										
				M48x2	56	2.5	22	26	M48x2	56	2.5	22	26										
				G 1/8	15	1	8	10.5	G 1/8	15	1	8	10.5										
				G 1/4	20	1.5	12	15.5	G 1/4	20	1.5	12	15.5										
				G 3/8	23	2	12	15.5	G 3/8	23	2	12	15.5										
				G 1/2	28	2.5	14	18.5	G 1/2	28	2.5	14	18.5										
				G 3/4	33	2.5	16	20	G 3/4	33	2.5	16	20										
				G1	40	2.5	18	23	G1	40	2.5	18	23										
				G 1 1/4	50	2.5	20	25	G 1 1/4	50	2.5	20	25										
				G 1 1/2	56	2.5	22	27	G 1 1/2	56	2.5	22	27										


08

测压接头  
Test Coupling

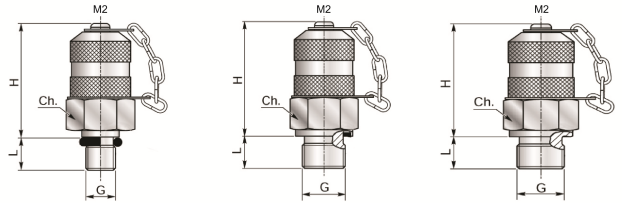

代号/Code	G	M2	Ch	L	H	可选密封形式 Choice sealing type
PT-01	M08×1.00	M16×2	17	8.0	37.0	A, B, C
PT-02	M10×1.00	M16×2	17	8.0	37.0	A, B, C
PT-03	M12×1.50	M16×2	17	10.0	37.0	A, B, C
PT-04	M14×1.50	M16×2	19	12.0	37.0	A, B, C
PT-05	M16×1.50	M16×2	22	12.0	37.0	A, B, C
PT-06	G1/8"	M16×2	17	10.0	37.0	A, B, C
PT-07	G1/4"	M16×2	19	12.0	37.0	A, B, C
PT-08	G3/8"	M16×2	22	14.0	37.0	A, B, C
PT-09	G1/2"	M16×2	27	15.0	37.0	A, B, C
PT-10	7/16" -20UNF	M16×2	17	10.0	37.0	E
PT-11	1/2" -20UNF	M16×2	17	10.0	37.0	E
PT-12	9/16" -18UNF	M16×2	19	10.0	37.0	E

备注: 如需要排气型测压点, 请在订购代码前加“P”, 例: PPT-01  
If you need test coupling with exhaust, the code will be PPT-\*, such as PPT-01.




代号/Code	G	M2	Ch	L	H	可选密封形式 Choice sealing type
PT-15	R1/8"	M16×2	17	10.0	37.0	D
PT-16	R1/4"	M16×2	19	12.0	37.0	D
PT-17	R3/8"	M16×2	22	14.0	37.0	D
PT-18	1/8" -27NPTF	M16×2	17	10.0	37.0	D
PT-19	1/4" -18NPTF	M16×2	19	14.0	37.0	D
PT-20	3/8" -18NPTF	M16×2	22	16.0	37.0	D


09



测压接头  
Test Coupling

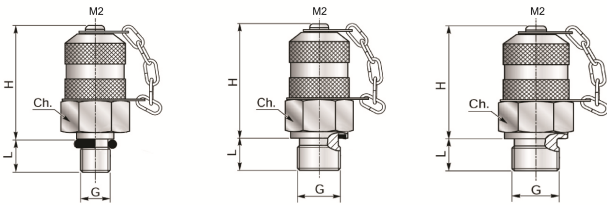


代号/Code	G	M2	Ch	L	H	可选密封形式 Choice sealing type
PT-13	M10×1	M12×1.25	17	8.0	37.0	A、B、C

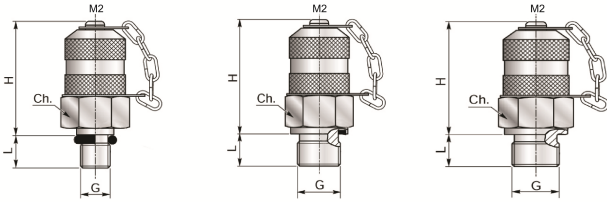

代号/Code	G	M2	Ch	L	H	可选密封形式 Choice sealing type
PT-14	M12×1.25	M14×1.5	17	8.0	37.0	A、B、C


测压接头  
Test Coupling



代号/Code	G	∅D	M2	Ch.1	H	可选密封形式 Choice sealing type
PTQ-01	M12×1.50	06L	M16×2	14	54.0	
PTQ-02	M14×1.50	06S	M16×2	17	54.0	
PTQ-03	M14×1.50	08L	M16×2	17	54.0	
PTQ-04	M16×1.50	08S	M16×2	19	59.0	
PTQ-05	M16×1.50	10L	M16×2	19	59.0	
PTQ-06	M18×1.50	10S	M16×2	22	59.0	
PTQ-07	M18×1.50	12L	M16×2	22	59.0	
PTQ-08	M20×1.50	12S	M16×2	24	59.0	
PTQ-09	M22×1.50	14S	M16×2	27	59.0	
PTQ-10	M22×1.50	15L	M16×2	27	59.0	
PTQ-11	M24×1.50	16S	M16×2	30	59.0	
PTQ-12	M26×1.50	18L	M16×2	32	59.0	
PTQ-13	M30×2.00	20S	M16×2	36	59.0	
PTQ-14	M30×2.00	22L	M16×2	36	62.0	
PTQ-15	M36×2.00	28L	M16×2	41	60.0	
PTQ-16	M36×2.00	25S	M16×2	46	65.0	
PTQ-17	M42×2.00	30S	M16×2	50	65.0	
PTQ-18	M45×2.00	35L	M16×2	50	62.0	
PTQ-19	M52×2.00	38S	M16×2	60	65.0	
PTQ-20	M52×2.00	42L	M16×2	60	65.0	


备注：如需要排气型测压点，请在订购代码前加“P”。例：PPTQ-01。  
If you need test coupling with exhaust, the code will be PPTQ-★, such as PPTQ-01.

测压接头  
Test Coupling




代号/Code	G	∅D	M2	Ch.1	H	可选密封形式 Choice sealing type
PTT-01	M12×1.50	06L	M16×2	14	54.0	
PTT-02	M14×1.50	06S	M16×2	17	54.0	
PTT-03	M14×1.50	08L	M16×2	17	54.0	
PTT-04	M16×1.50	06S	M16×2	19	59.0	
PTT-05	M16×1.50	10L	M16×2	19	59.0	
PTT-06	M18×1.50	10S	M16×2	22	59.0	
PTT-07	M18×1.50	12L	M16×2	22	59.0	
PTT-08	M20×1.50	12S	M16×2	24	59.0	
PTT-09	M22×1.50	14S	M16×2	27	59.0	
PTT-10	M22×1.50	15L	M16×2	27	59.0	
PTT-11	M24×1.50	16S	M16×2	30	59.0	
PTT-12	M26×1.50	18L	M16×2	32	59.0	
PTT-13	M30×2.00	20S	M16×2	36	59.0	
PTT-14	M30×2.00	22L	M16×2	36	62.0	
PTT-15	M36×2.00	28L	M16×2	41	60.0	
PTT-16	M36×2.00	25S	M16×2	46	65.0	
PTT-17	M42×2.00	30S	M16×2	50	65.0	
PTT-18	M45×2.00	35L	M16×2	50	62.0	
PTT-19	M52×2.00	38S	M16×2	60	65.0	
PTT-20	M52×2.00	42L	M16×2	60	65.0	

测压接头  
Test Coupling



代号/Code	G	M2	Ch.1	Ch.2	H	可选密封形式 Choice sealing type
PTD-01	G1/4"	M16×2	32	19	54.0	
PTD-02	G3/8"	M16×2	32	22	54.0	
PTD-03	G1/2"	M16×2	32	27	54.0	
PTD-04	G3/4"	M16×2	32	32	59.0	
PTD-05	G1"	M16×2	41	41	59.0	



代号/Code	G	M2	Ch	S max	H	可选密封形式 Choice sealing type
PTG-01	7/16"-20UNF	M16×2	32	9	68.0	
PTG-02	1/2"-20UNF	M16×2	32	9	68.0	
PTG-03	9/16"-18UNF	M16×2	32	9	69.0	

接头示例 Sample of Test Couplings



测压盒  
Pressure Test Kit

测压盒 Pressure Test Kit

型号(Type): GDTK-25



配置描述 Description	数量Quantity: PCS
压力表 Pressure gauge: φ63mm - 6MPa	1
压力表 Pressure gauge: φ63mm - 25MPa	1
测压软管 Test hose: Length = 1500mm	2
微型测压头 Test coupling: G1/4,	1
微型测压头 Test coupling: M14 × 1.5	1

型号(Type): GDTK-40



配置描述 Description	数量Quantity: PCS
压力表 Pressure gauge: φ63mm - 10MPa	1
压力表 Pressure gauge: φ63mm - 25MPa	1
压力表 Pressure gauge: φ63mm - 40MPa	1
测压软管 Test hose: Length = 1500mm	3
微型测压头 Test coupling: M10*1,	1
微型测压头 Test coupling: M14 × 1.5	1
微型测压头 Test coupling: G1/4,	1
微型测压头 Test coupling: R1/4	1

型号(Type): GDTK-60



配置描述 Description	数量Quantity: PCS
压力表Pressure gauge: φ63mm - 25MPa	1
压力表Pressure gauge: φ63mm - 40MPa	1
压力表Pressure gauge: φ63mm - 60MPa	1
测压软管Test hose: Length = 1500mm	3
微型测压头Test coupling: M10*1,	1
微型测压头Test coupling: M14 × 1.5	1
微型测压头Test coupling: G1/4,	1
微型测压头Test coupling: R1/4	1
微型测压头Test coupling: UNF7/16-20	1
微型测压头Test coupling: NPT1/4-18	1

型号(Type):GDTK-60B



配置描述 Description	数量Quantity: PCS
Pressure gauge: Ø63mm/G1/4-16MPa	1
Pressure gauge: Ø63mm/G1/4-40MPa	1
Pressure gauge: Ø63mm/G1/4-60MPa	1
Test hose: Length=1500mm	3
Test coupling: M10×1	1
Test coupling: M14×1.5	1
Test coupling: G1/4	1
Test coupling: R1/4	1
Test coupling: UNF7/16-20	1
Test coupling: 1/4-18NPTF	1

备注：测压盒可以根据客户的要求进行配置 Remark: Pressure gauge and test couplings can be changed according to customer

测压盒  
Pressure Test Kit

型号(Type):GDTK-70



配置描述 Description	数量Quantity: PCS
Pressure gauge: Ø63mm/G1/4-16MPa	1
Pressure gauge: Ø63mm/G1/4-40MPa	1
Pressure gauge: Ø63mm/G1/4-60MPa	1
Test hose: Length=1500mm	3
Test coupling: G1/8	1
Test coupling: G1/4	1
Test coupling: G3/8	1
Test coupling: M10*1	1
Test coupling: M10*1.25	1
Test coupling: M14*1.5	1
Test coupling: UNF7 / 16-20	1
Test coupling: UNF9 / 16-18	1
Quick Connector B: for Caterpillar CAT	1

型号(Type):GDTK-100



配置描述 Description	数量Quantity: PCS
Pressure gauge: Ø63mm/G1/4-6MPa	1
Pressure gauge: Ø63mm/G1/4-25MPa	1
Pressure gauge: Ø63mm/G1/4-40MPa	1
Pressure gauge: Ø63mm/G1/4-60MPa	1
Test hose: Length=1500mm	4
Quick Connector B: for Caterpillar CAT	1
Test coupling: M10×1	1
Test coupling: M10×1.5	1
Test coupling: M9/16	1
Test coupling: M7/16	1
Test coupling: M14×1.5	1
Test coupling: G1/8	1
Test coupling: G3/8	1
Test coupling: G1/4	1

型号(Type):Fitting box



配置描述 Description	数量Quantity: PCS
Tee connection: 3/8 Female	1
Tee connection: 3/8 Male	1
Tee connection: M18×1.5 Female	1
Tee connection: M18×1.5 Male	1
Tee connection: M16×1.5 Female	1
Tee connection: M16×1.5 Male	1
Tee connection: 7/16 Female	1
Tee connection: 1/4 Female	1
Tee connection: 1/4 Male	1
Tee connection: M14×1.5	1
Tee connection: M14×1.5 Female	1
Tee connection: 11/16	1
Tee connection: 9/16 Female	1
Tee connection: 9/16	1

测压盒  
Pressure Test Kit

型号 (Type): GDTK-EX



型号 (Type): GDTK-EXS




配置描述 Description	数量Quantity: PCS
Pressure gauge: 063mm/G1/4-6MPa	1
Pressure gauge: 063mm/G1/4-25MPa	1
Pressure gauge: 063mm/G1/4-40MPa	1
Pressure gauge: 063mm/G1/4-60MPa	1
Test hose: Length=1500mm	4
Test coupling: M10×1	1
Test coupling: M10×1.25	1
Test coupling: M9/16	1
Test coupling: M7/16	1
Test coupling: M12×1.5	1
Test coupling: M14×1.5	1
Test coupling: M16×1.5	1
Test coupling: G1/8	1
Test coupling: G3/8	1
Test coupling: G1/4	1
Tee connection: 3/8 Female	1
Tee connection: 3/8 Male	1
Tee connection: M18×1.5 Female	1
Tee connection: M18×1.5 Male	1
Tee connection: M16×1.5 Female	1
Tee connection: M16×1.5 Male	1
Tee connection: 7/16 Female	1
Tee connection: 1/4 Female	1
Tee connection: 1/4 Male	1
Tee connection: M14×1.5	1
Tee connection: M14×1.5 Female	1
Tee connection: 11/16	1
Tee connection: 9/16 Female	1
Tee connection: 9/16	1

配置描述 Description	数量Quantity: PCS
Pressure gauge: 063mm/G1/4-6MPa	1
Pressure gauge: 063mm/G1/4-10MPa	1
Pressure gauge: 063mm/G1/4-25MPa	1
Pressure gauge: 063mm/G1/4-40MPa	1
Pressure gauge: 063mm/G1/4-60MPa	1
Test hose: Length=1500mm	5
Test coupling: M10×1	1
Test coupling: M10×1.25	1
Test coupling: M9/16	1
Test coupling: M7/16	1
Test coupling: M12×1.5	1
Test coupling: M14×1.5	1
Test coupling: M16×1.5	1
Test coupling: M18×1.5	1
Test coupling: G1/8	1
Test coupling: G3/8	1
Test coupling: G1/4	1
Tee connection: 3/8 Female	1
Tee connection: 3/8 Male	1
Tee connection: M18×1.5 Female	1
Tee connection: M18×1.5 Male	1
Tee connection: M16×1.5 Female	1
Tee connection: M16×1.5 Male	1
Tee connection: 7/16 Female	1
Tee connection: 1/4 Female	1
Tee connection: 1/4 Male	1
Tee connection: M14×1.5	1
Tee connection: M14×1.5 Female	1
Tee connection: 11/16	1
Tee connection: 1/4 Female	1
Tee connection: 1/4	1

备注: 我们可以按照客户的要求进行生产 Remark: We can produce according to customer requirements.

压力表  
Pressure Gauge

压力表 Pressure gauges

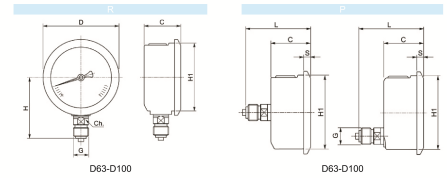

	D	G	H	H1	L	S	C	Ch	KI	% F.S
D63	63	G 1/4" A / NPT1/4	54	62	56	6.5	32	14	1.6	
D100	100	G 1/2" A / NPT1/2	87	100	81.5	8	48	22	1	

Range/MPa	D63		Range/MPa	D100	
	代号/Code			代号/Code	
0...0.1	063.001R	063.001P	0...0.1	100.001R	100.001P
0...0.16	063.V16R	063.V16P	0...0.16	100.V16R	100.V16P
0...0.25	063.V25R	063.V25P	0...0.25	100.V25R	100.V25P
0...0.4	063.004R	063.004P	0...0.4	100.004R	100.004P
0...0.6	063.006R	063.006P	0...0.6	100.006R	100.006P
0...1	063.010R	063.010P	0...1	100.010R	100.010P
0...1.6	063.016R	063.016P	0...1.6	100.016R	100.016P
0...2.5	063.025R	063.025P	0...2.5	100.025R	100.025P
0...4	063.040R	063.040P	0...4	100.040R	100.040P
0...6	063.060R	063.060P	0...6	100.060R	100.060P
0...10	063.100R	063.100P	0...10	100.100R	100.100P
0...16	063.160R	063.160P	0...16	100.160R	100.160P
0...25	063.250R	063.250P	0...25	100.250R	100.250P
0...40	063.400R	063.400P	0...40	100.400R	100.400P
0...60	063.600R	063.600P	0...60	100.600R	100.600P

超高压压力表 Super high pressure gauges



Range/MPa	D100	
	代号/Code	
0...100	100.1000R	100.1000P
0...160	100.1600R	100.1600P
0...200	100.2000R	100.2000P
0...250	100.2500R	100.2500P
0...300	100.3000R	100.3000P
0...400	100.4000R	100.4000P